

Geocel Pro Fit® Pocket

1. PRODUCT NAME:

Geocel Pro Fit® Pocket

2. MANUFACTURER:

Geocel Products Group
A Business Unit of
The Sherwin-Williams Company
("Geocel Products Group")
Cleveland, OH 44115
Phone: (800) 348-7615
Fax: (800) 348-7009
www.GeocelUSA.com

3. PRODUCT DESCRIPTION:

The Patented Geocel Pro Fit® Pocket is a highly flexible, easy solution for sealing roof penetrations. The Pocket is easily shaped to fit around even the most challenging configuration without the complex cutting or assembly found with other pockets and pans.

Geocel Pro Fit Pocket seals roof penetrations on EPDM, primed TPO, primed PVC, BUR, metal, asphalt, and other roofing substrates. It installs in 15 minutes or less with no flashing, priming*, or complicated roof expertise required. See back for various configurations.

Geocel Pro Fit Pocket is extruded from advanced PVC specifically designed for rigorous weather and roof movement conditions. Even in adverse temperature ranges the Pocket will not crack or degrade. Available in black, it comes in 2" or 4" heights.

Product Benefits:

- Fits penetrations that prefabricated pockets and pans cannot
- Can be installed in damp conditions
- Create a single or multiple Pockets from one 56" Pocket
- Quick, easy installation

Basic Uses:

- Sealing large, small, cluster, parapet wall, and roof anchoring roof penetrations

Packaging: 56" x 2", 56" x 4"

Color: Black

Limitations:

- Do not apply, store, or install in temperatures of 30° F (-1° C) or below


4. INSTALLATION:

Before installing Geocel Pro Fit Pocket on an existing roof, confirm whether or not a contractor or manufacturer's warranty is in effect. Installing on a warranted roof without prior authorization from those issuing the warranty may void it. If the existing roof system is covered by a warranty, be sure to obtain proper authorization prior to installation.

Geocel Products Group recommends using Geocel 4500® Roof Bonding Sealant to seal around the roof penetration, bond the overlapping ends of the Pocket, and seal around the exterior perimeter of the Pocket. It can also be used to affix the Pocket to the roof surface in place of mechanical fasteners. To complete the installation, pour 4525™ Semi-self-leveling Sealant into the Pocket cavity and tool as needed. Make sure to tool the sealant in an upward direction toward the penetration.

*When installing on TPO and PVC membranes and using Geocel 4500 Roof Bonding Sealant and 4525 Sealant, a primer must be used. Consider using 45P® TPO & PVC Primer for these applications.

See the Installation Instruction sheet for complete details.

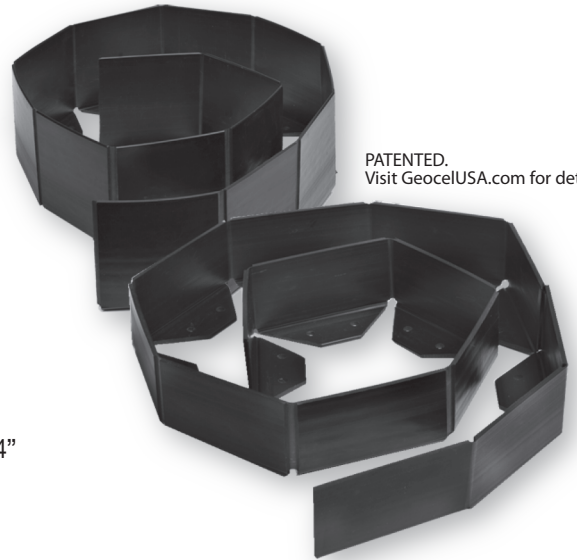

PATENTED.
Visit GeocelUSA.com for details.

Surface Preparation:

For best results, ensure surfaces are clean, dry, sound, and frost-free; although some moisture will not interfere with the sealants adhesion. Use a wire brush to remove all previously applied caulk, asphalt, pitch, cement, and other contaminants surrounding the penetration. Also be sure to remove contaminants, such as plastic cement and asphalt, from roof penetrations and pipes. Brush away all loose debris before installing the Pocket.

5. AVAILABILITY AND COST:

Available from various construction material and industrial distributors. Cost and further technical data are available from your local Geocel Products Group representative or from our office.

6. LIMITED WARRANTY:

If when applied according to label directions this product fails to perform in accordance with its published literature, upon satisfactory evidence of product failure, and as your sole remedy, we will either replace the product at no cost or refund the original purchase price for that portion of product that fails to perform in accordance with this limited warranty. Labor or costs associated with labor are not included. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY, WHICH ARE ALL DISCLAIMED AND/OR LIMITED IN

DURATION TO THE EXTENT PERMITTED BY LAW. WE SHALL NOT BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS) FROM ANY CAUSE WHATSOEVER AND SUCH DAMAGES ARE EXPRESSLY EXCLUDED. Some states do not allow the exclusion or limitation of incidental or consequential damages or how long an implied warranty lasts, so the above limitation or exclusion may not apply to you. This limited warranty gives you specific legal rights, and you may also have other rights which vary from state to state.


7. MAINTENANCE:

No maintenance should be required.

8. TECHNICAL SERVICES:

Geocel Products Group representatives throughout the U.S. are available to provide technical assistance. Geocel Products Group's in-house technical staff and laboratory facilities are equipped to respond to specific requests for further information and/or applications testing.

For additional information, visit us on the web at www.GeocelUSA.com

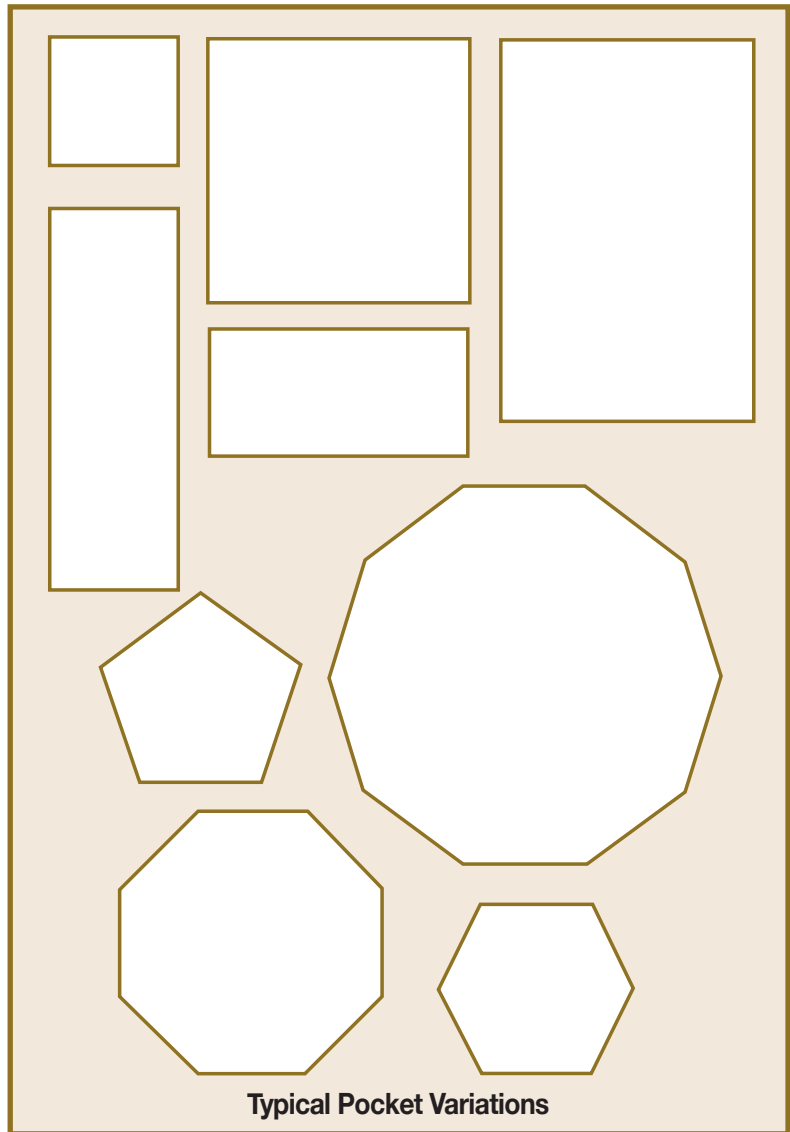

Typical Pocket Variations